

OPERATOR CERTIFICATION MATH SHEET

DO NOT WRITE ON MATH SHEET

◆ Equivalents ◆

1 cubic foot	= 7.48 gallons
1 cubic yard	= 27 cubic feet
1 gallon of water	= 8.34 pounds
1 p.s.i.	= 2.31 feet of water
1 foot of head	= 0.43 p.s.i.
1 horsepower	= 0.746 kilowatts
1 acre	= 43,560 square feet
1 mile	= 5,280 feet

1 day	= 1440 minutes
1 mg/L	= 1 ppm
1 MGD	= 694 gpm
π (Pi)	= 3.14
Radius of circle	= diameter \div 2
Circumference of circle	= π x diameter
Temp. °Centigrade	= (°Fahrenheit - 32°) x 0.55
Temp. °Fahrenheit	= (°Centigrade x 1.8) + 32°F

◆ Area and Volume Formulas ◆

Circles/Cylinders:

Area, sq. ft. = π x radius, ft. x radius, ft.

Volume, cu. ft. = π x radius, ft. x radius, ft. x height, ft.

Cone:

Volume, cu. ft. = $0.33 \times \pi$ x radius, ft. x radius, ft. x height, ft.

◆ General Formulas ◆

Detention Time, hr. = $\frac{\text{volume, gal.} \times 24 \text{ hr./day}}{\text{flow, gpd}}$

Velocity, ft./sec. = $\frac{\text{flow, cu. ft./sec.}}{\text{area, sq. ft.}}$

Velocity, ft./sec. = $\frac{\text{distance, ft.}}{\text{time, sec.}}$

Velocity, ft./sec. = $\frac{\text{gpm}}{\text{diameter, in.} \times \text{diameter, in.} \times 2.448}$

Water HP = $\frac{\text{flow, gpm} \times \text{feet of head}}{3960}$

Brake HP = $\frac{\text{water horsepower}}{\text{pump efficiency (decimal \%)}}$

Motor HP = $\frac{\text{water horsepower}}{\text{pump efficiency (decimal \%)} \times \text{motor efficiency (decimal \%)}}$

Flow, cu. ft./sec. = area, sq. ft. x velocity, ft./sec.

Dose, mg/L = $\frac{\text{chemical feed, lbs./day}}{\text{flow, MGD} \times 8.34 \text{ lbs./gal.}}$

Chemical Feed, lbs./day = flow, MGD x dose, mg/L x 8.34 lbs./gal.

Chemical Feed, lbs. = volume, MG x dose, mg/L x 8.34 lbs./gal.

Solids Applied, lbs./day = flow, MGD x conc., mg/L x 8.34 lbs./gal.

◆ Chlorine Formulas ◆

Chlorine Dose, mg/L = chlorine demand, mg/L + chlorine residual, mg/L

Chlorine Residual, mg/L = chlorine dose, mg/L - chlorine demand, mg/L

Chlorine Demand, mg/L = chlorine dose, mg/L - chlorine residual, mg/L

Pounds/Day of HTH = $\frac{\text{lbs./day chlorine needed}}{\text{decimal \% chlorine of HTH}}$

Rectangles:

Area, sq. ft. = length, ft. x width, ft.

Volume, cu. ft. = length, ft. x width, ft. x height, ft.

Weir Overflow Rate, gpd/ft. = $\frac{\text{flow rate, gpd}}{\text{length of weir, ft.}}$

Surface Loading Rate, gpd/sq.ft. = $\frac{\text{flow rate, gpd}}{\text{area, sq. ft.}}$

Solids Loading, lbs./day/sq.ft. = $\frac{\text{solids applied, lbs./day}}{\text{surface area, sq. ft.}}$

% Stroke Setting = $\frac{\text{required feed, gpd}}{\text{maximum feed, gpd}} \times 100$

% Removal = $\frac{(\text{in} - \text{out})}{\text{in}} \times 100$


Screening Removed = $\frac{\text{screenings, cu. ft.}}{\text{flow, MGD}}$

Day's Supply = $\frac{\text{total chemical in inventory, lbs.}}{\text{average use, lbs./day}}$

\$ Cost Per Day = hp x 0.746 x \$ rate x hours/day

Dose, mg/L = $\frac{\text{chemical feed, lbs.}}{\text{volume, MG} \times 8.34 \text{ lbs./gal.}}$

Slope = $\frac{\text{fall, ft.}}{\text{length, ft.}}$

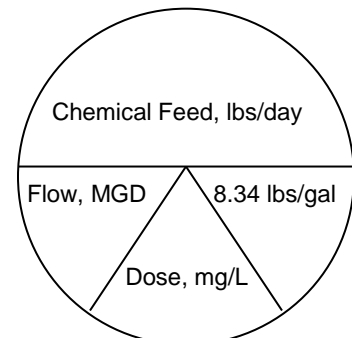

◆ **Water Math** ◆

$$\text{Filtration Rate, gpm/sq.ft.} = \frac{\text{flow rate, gpm}}{\text{filter surface area, sq. ft.}}$$

$$\text{Filter Backwash Rate, gpm/sq.ft.} = \frac{\text{backwash flow rate, gpm}}{\text{filter surface area, sq. ft.}}$$

$$\text{Filter Backwash Water \%} = \frac{\text{backwash water, gal.}}{\text{water filtered, gal.}} \times 100$$

$$\text{Wash Water, gpm} = \frac{\text{area, sq. ft.} \times \text{rise, ft.} \times 7.48 \text{ gal./cu. ft.}}{\text{minutes}}$$

$$\text{Reservoir Volume, ac./ft.} = \frac{\text{reservoir volume, cu. ft.}}{43,560 \text{ sq. ft./ac.}}$$

$$\text{Reservoir Volume, gal.} = \text{volume, ac-ft.} \times 43,560 \text{ sq. ft./ac.} \times 7.48 \text{ gal./cu. ft.}$$

$$\text{Surface Area, ac.} = \frac{\text{surface area, sq. ft.}}{43,560 \text{ sq. ft./ac.}}$$

$$\text{Chemical Feed, lbs.} = \text{surface area, ac.} \times \text{dose, lbs./ac.}$$

$$\text{Mean or Average} = \frac{\text{sum of values or measurements}}{\text{number of values or measurements}}$$

Median = middle value of a group of data

$$\text{Specific Yield, gpm/ft} = \frac{\text{Well Yield, gpm}}{\text{Drawdown, ft.}}$$

$$\text{Drawdown, ft.} = \text{Pumping Water Level, ft.} - \text{Static Water Level, ft.}$$

◆ **Wastewater Math** ◆

$$\text{Grit Removed, cu. ft./MG} = \frac{\text{volume of grit, cu. ft.}}{\text{volume of flow, MG}}$$

$$\text{Pond, Detention Time, days} = \frac{\text{pond volume, ac-ft}}{\text{flow rate, ac-ft/day}}$$

$$\text{Pond Area, acres} = \frac{\text{avg. width, ft.} \times \text{avg. length, ft.}}{43,560 \text{ sq. ft./acre}}$$

$$\text{Pond, Population Loading, (number of persons/acre)} = \frac{\text{population served, persons}}{\text{pond area, acres}}$$

$$\text{Pond, Organic Loading (lbs. BOD/day/acre)} = \frac{\text{BOD, mg/L} \times \text{flow, MGD} \times 8.34 \text{ lbs./gal.}}{\text{Pond area, acres}}$$

$$\text{Pond, Hydraulic Loading (inches per day)} = \frac{\text{depth of pond, inches}}{\text{detention time, days}}$$

$$\text{Trickling Filter, Organic Loading (lbs. BOD/day 1,000 cu. ft.)} = \frac{\text{BOD applied, lbs./day}}{\text{volume of media, 1,000 cu. ft.}}$$

$$\text{Sludge Age (in days)} = \frac{\text{MLSS in aeration tank (lbs.)}}{\text{TSS entering aeration tank (lbs/day)}}$$

$$\text{Sludge Volume Index (SVI), ml/g} = \frac{30 \text{ min. settleability test, ml/L} \times 1,000 \text{ mg/g}}{\text{MLSS, mg/L}}$$